

**10/100M Media Converter**  
**1\*SC optical port & 1\*RJ45 port**  
**DK-MC0135-20A**  
**DK-MC0153-20B**




The DK-MC0135 series media converter adopts store and forward, no fan, low power consumption design, with the advantages of convenient use, small size and simple maintenance. Product design  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$  wide range of operating temperature, stable and reliable performance, can be widely used in a variety of broadband data transmission fields.

## Main Features

- Input voltage: DC5V
- Operating temperature:  $-20^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- Cooling mode: no fan design
- Forwarding mode: store and forward

## Product Size

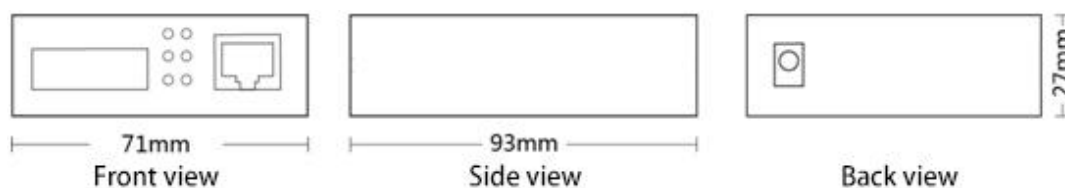

## Product Parameter

Provider Mode Ports	
Fixed port	1*100 Base-X, 1*10/100 Base-T
Power interface	DC port
LED Indicators	PWR, Link/ACT LED
Cable type&Transmission distance	
Twisted-pair)	0-100m (CAT5e, CAT6)
Monomode optical fiber	20KM
Electrical Specifications	
Input voltage	DC5V
Total Power consumption	Total power<4W
Environment	
Operating temperature	-20°C~+70°C
Storage temperature	-20°C~+70°C
Relative humidity	5%~95% non-condensing
Thermal methods	Fanless design, natural heat dissipation
MTBF	100,000 hours
Mechanical Dimensions	
Product size	93x71x27mm
Installation Method	Desktop
Weight	0.15KG*2
Certification	
Certification	CE/FCC/RoHS
Accessories	
Accessories	Device, manual, power adapter(EU/US/UK/AU plug optional)

## Order information

Model	Description
DK-MC0135-20A DK-MC0153-20B	1*1000 Base-X, 1*10/100/1000 Base-T, 1310/1550nm, 20KM